



Dimensioner

Type KM 1

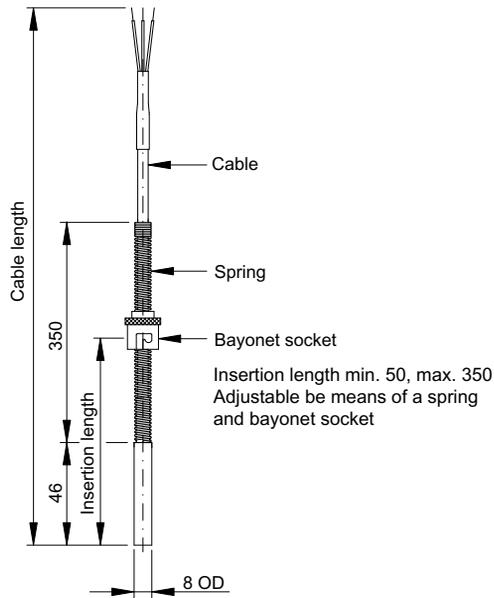


Mounting

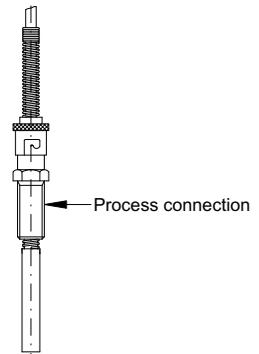

Properties for cable

Insulation	Temperature range	Application
Teflon (FEP)	-50 +200°C	Corrosion and heat resistance

Process connection

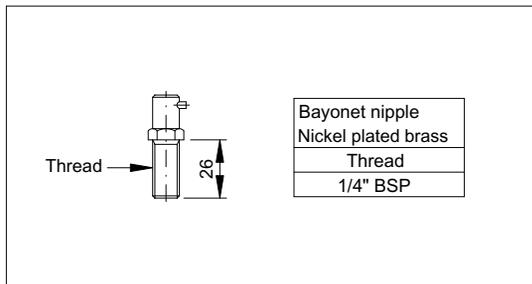

Teflon w/shield Shield connected to outer sheath	
1xPt100 2- 3- 4-wire	2xPt100 2-wire
Red	Red
Red/green	Red/green
Wh/green	Wh/green
White	White