

signal

JOFRA[®]
calibration **»K**

» **Calibrate 24 temperature sensors**

Design your own calibration procedures - start calibrating and leave for other tasks. Save precious time and calibrate all sensors under exactly the same conditions

» **Data-logging for multiple sensors**

Software for data logging of up to 24 sensors with user-defined interval

» **Prepared for future expansions**

8 more channels for every ASM-800. Expand the system when required and save the investment until it is necessary

» **Calibrate any temperature sensor**

Universal input to handle: 2-, 3-, 4-wire RTD's, TC's, transmitters, thermistors, thermo switches and voltage

» **Integrate with JOFRA instruments**

Combine ASM with any JOFRA dry-block, DTI reference thermometer or ASC300 signal calibrator. Adds value to your existing JOFRA equipment

» **Reference sensor input included**

Dedicate one input channel for your temperature reference sensor with an accuracy to 0.026°C / 0.047°F

» **Reduce the human factor uncertainty**

Automatic procedures leave no space for operation errors

» **Documentation made easy**

RS232 communication and JOFRACAL calibration software are included in the standard delivery

ISO 9001 Manufacturer

Specification Sheet
SS-ASM

Advanced Signal Multi-scanner **ASM**



The ASM series (Advanced Signal Multi-scanner) offers a unique time-saving and automatic solution to calibrate multiple temperature sensors simultaneously.

The ASM-800 series is designed for use where ever temperature measurement is critical and/or there is a need for traceable calibration documentation.

Easy, flexible and time-saving!

The ASM series is a series of 8-channel scanners controlled by JOFRACAL software through a PC. Up to 3 ASM units can be stacked to calibrate up to 24 sensors at the same time. It can handle signals from 2-, 3- and 4 wire RTD's, TC's, transmitters, thermistors, temperature switches and voltage.

The solution includes the easy-to-use software JOFRACAL to set up, execute, print and save the valuable traceable calibration data - just connect the ASM to a PC through a RS232 cable.

JOFRACAL controls all JOFRA dry-block heating/cooling sources and includes the flexibility to use manual liquid baths, ice-points or dry-blocks. Connect the reference temperature sensor directly to the ASM-800 or use your existing JOFRA temperature reference device.

Furthermore the JOFRALOG software allows the user to use the ASM scanner as a data-logging device for up to 24 sensors.

Basic versions

The ASM-series is available in 3 versions depending on the kind of sensors to be measured.

ASM-801 has 8 universal plugs. This is a fixed screw terminal solution used to measure RTD's, TC's, mA, voltage, ohm, and transmitters. It measures the cold junction (CJ) temperature for each channel and is able to supply a very accurate cold junction (CJ) temperature compensation.

ASM-802 has 8 small TC plugs for measurement of TC sensors. This model also measures the cold junction (CJ) temperature for each channel and is able to supply a very accurate cold junction (CJ) temperature compensation.

ASM-803 has 8 LEMO plugs, which are primarily for measurement of RTD sensors. This solution makes it possible to measure current, voltage and ohm. It has built-in loop power supply for each channel.

Models

The ASM multi-scanner is made in an A and a B model. The ASM B model is the complete solution with integrated scanner and high accuracy multi signal measuring circuits. The ASM A model is less expensive and is designed to add 8 channel scanning capabilities to an existing instrument. The A model therefore needs the measuring capabilities from a JOFRA dry-block ATC B model, JOFRA ASC300 signal calibrator, DTI-1000 reference thermometer or an ASM B model.

A model

The A model use the measuring circuit of an existing instrument. This means that the normal set-up of the measuring equipment is used, and the multi-scanner then makes it possible to calibrate up to 8 sensors simultaneously. The built-in cold junction temperature measuring circuit ensures high accuracy when calibrating thermocouples. The A model is also capable of working without the JOFRACAL with a manual channel selector at the back.

The A model may transmit an analogue signal of up to 8 sensors to one connected measuring device. It is able to transmit signals up to 30VDC, 30 mA.

B model

The B model has the same functions as the A model, but it differs as it is not necessary to include a measuring instrument in the set-up, as the multi-scanner has built-in measurement capabilities.

The most important advantage of the B model is the fact that it is possible to obtain huge reductions in time of the calibration procedure. The B model is able to perform several measurements each second, whereas the A model as an example will spend approx. 15 seconds on each measurement, when connected to an RTC B model.

The B models is able to measure voltage up to 10V, resistance up to 4KΩ and current up to 24mA.

True Ohm Measurement

The ASM-801 and ASM-803 employ state-of-the-art DC measuring techniques. To achieve high accuracy, the measuring principle used by the ASM is True Ohm Measurement thus eliminating the EMF from cables, sockets, and sensors.

True Ohm Measurement is a proven method to achieve accurate compensation for errors induced by thermal effects. The resistance is measured through the 4-wire system at 0.8 mA, after which the instrument takes a reading without any applied current. The second reading is the "error EMF".

Measurement of up to 24 sensors at the same time

For both ASM models it is possible to connect up to 3 ASM multi-scanners, enabling you to measure up to 24 sensors simultaneously. Both models are able to perform / transmit the following measurements: 2-, 3- and 4-wire RTD, TC signals with or without cold junction (CJ) compensation, thermistors, transmitters, current, voltage, and ohm sources / loads.


ASM-801 A/B and ASM 803 A/B both have built-in 24 V loop power for 4-20 mA transmitter.


Data-logging for multiple sensors

The data acquisition software JOFRALOG allows the user to utilize the ASM multi-scanner as a data-logging device for multiple sensors. The JOFRALOG program allows the configuration and execution of a logging procedure collecting data from up to 24 sensors saving the data in a format compatible to Microsoft Excel.

JOFRALOG works with a ASM B model for collecting data from 8 channels. By adding 1 og 2 ASM A models, the number of channels may be expanded to 16 or 24. When the user has defined a scanning job, the user may store the configuration including sensor definitions for every channel in a configuration file. Whenever required the information may be loaded and reused. On start-up the previous configuration used is always loaded automatically saving the user a lot of time. Furthermore the uploaded information will be checked against the configuration to determine any conflicts.

JOFRALOG can be downloaded at www.jofra.com

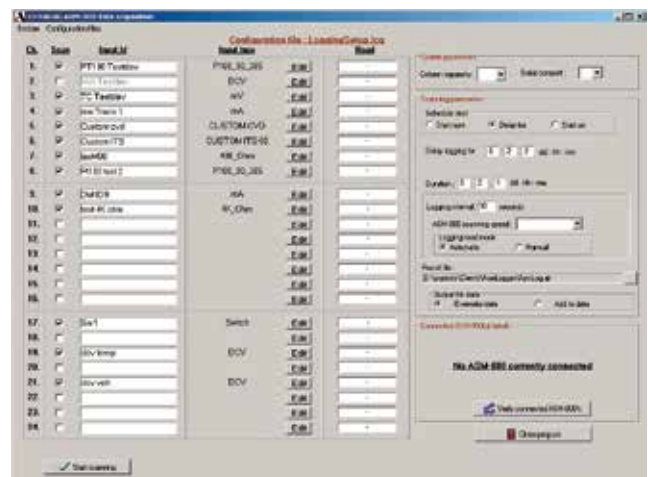

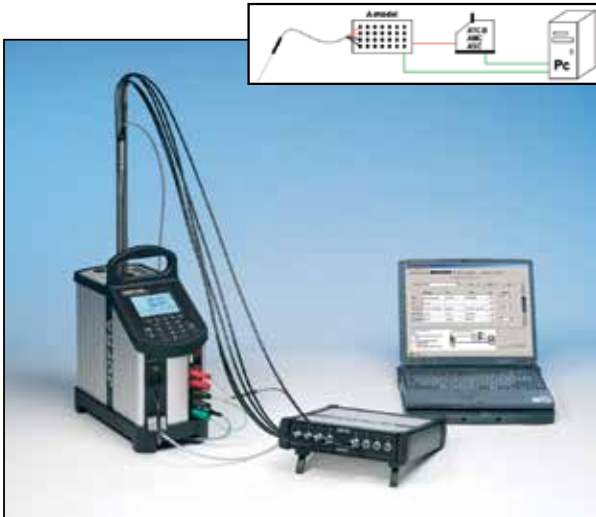


Picture 1: ASM-803 A connected to the input's of a JOFRA ATC B model and controlled by JOFRACAL.


Combine the ASM signal multi-scanner with any of your existing JOFRA dry-block or liquid bath calibrators. You can also use your JOFRA DTI reference thermometer or even the JOFRA ASC300 signal calibrator, which adds further value to your existing JOFRA equipment.



Picture 2: ASM-803 B performing its own measurements in a JOFRA ITC-320 A including an STS reference sensor in channel one all controlled by JOFRACAL.

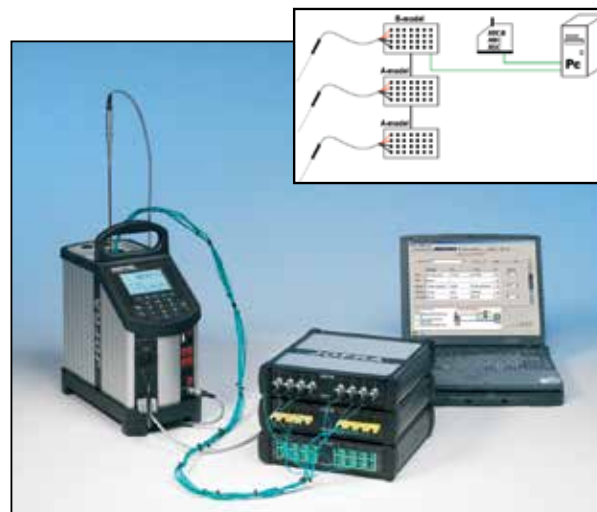

Picture 3: 2 ASM A models connected to the ASM B model, in order to obtain 24 channels. In this set-up the JOFRA ATC B model is used as a dry-block with the reference sensor connected to the reference input of the ATC. All controlled by JOFRACAL.

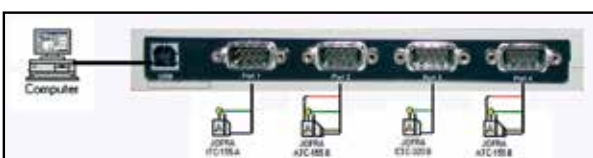

Edgeport converter - Order number 125002

The edgeport converter converts one USB port to four RS232 ports without external power supply. Tested with JOFRA calibrators and JOFRACAL calibration software

JOFRACAL CALIBRATION SOFTWARE

JOFRACAL calibration software ensures easy calibration of RTD's, thermocouples, transmitters, thermoswitches, pressure gauges and pressure switches. JOFRACAL can be used with JOFRA DPC-500, HPC and IPI pressure calibrators, all JOFRA temperature calibrators, as well as JOFRA AMC910, ASC300 multi signal calibrator and ASM-800 signal multi scanner. When used with JOFRA ASM-800 signal multi scanner, JOFRACAL can perform a simultaneous semi automatic calibration on up to 24 pressure and/or temperature devices under test in any combination.

JOFRACAL software controls the complete calibration procedure, stores the results and provides a calibration audit trail through hard-copy certificates. All calibration data are stored for each sensor to monitor drift and optimise recalibration intervals. A scheduler feature allows planning of future calibrations.

Using JOFRACAL together with the ASM multi-scanner allows the user to customize all calibration routines. The software is easy-to-use so you do not have to be a programmer to configure your own calibration procedures. The software features prompts, menus, and help functions that guide you through the configuration process.

If up to three ASM multi-scanners are connected, the software enables the instruments to measure sensors of the same type simultaneously. When working with the ASM series, the sensors connected need to be of the same type. Only exception being channel 1, which can always be used for the temperature reference sensor.

REQUIREMENTS JOFRACAL

Minimum hardware requirements:

- Intel® Pentium® II 1.4 GHz processor.
- 64MB RAM (128MB recommended)
- 80MB free disk space on hard disk (120MB recommended) prior to installation
- Standard VGA (800x600, 256 colours). 1024x768 recommended.
- CD-ROM drive for installation of program
- 1 or 2 free RS-232 serial ports, depending on configuration

Minimum software requirements:

- Microsoft Windows® 98, Microsoft Windows® NT 4.0, Microsoft Windows® 2000, Microsoft Windows® ME, Microsoft Windows® XP, Vista.
- System fonts: MS Sans Serif and Arial



JOFRA STS REFERENCE SENSORS

The ASM series handles signals from 2-, 3- and 4 wire RTD's, TC's, transmitters, thermistors, temperature switches and voltage.

All sensors under test are compared to a temperature reference sensor. The reference sensor can be the internal reference sensor in a dry-block or an external reference sensor, which is connected to channel one on the ASM multi-scanner.



To get an ideal reference system, JOFRA offers a range of reference sensors. All JOFRA Superior Temperature Standard sensors are economical and offer fast response times, low immersion depths, compact physical sizes, and specified low drift rates: even at high temperatures. These are all important considerations when selecting a reference sensor.

SYSTEM ACCURACY - STS SENSOR

- 50 to 400°C / -58°F to 752°F±0.050°C / ±0.090°F 1) 2)
- 50 to 400°C / -58°F to 752°F ±0.070°C / ±0.126°F 1) 3)
- 50 to 650°C / -58°F to 1202°F ... ±0.080°C / ±0.144°F 1) 2)
- 50 to 650°C / -58°F to 1202°F ±0.110°C / ±0.198°F 1) 3)

Note: System accuracy using STS-100 sensor, 12 months use - order system calibration for full documentation / traceability

- 1) Specified at 95% confidence interval k=2, over full range, including 1 calibration uncertainty, excluding 1 LSD (Least Significant Digit).
- 2) Excl. sensor drift (please see long term stability at page 5)
- 3) Incl. sensor drift (please see long term stability at page 5) after 100 hours at max. temperature.

FUNCTIONAL SPECIFICATIONS

Power supply

Power supply External AC/DC adapter
 Input 90 – 254V, 45 – 65Hz
 Output 30V ±2% regulated DC, max. 30W

Scanning rate

Scanning rate Max. 5 channels per seconds

PHYSICAL SPECIFICATIONS

Instrument dimensions

L x W x H 250 x 249 x 69 mm (9.8 x 9.8 x 2.7 in)

Instrument weight

Net weight 2.3 kg (5.07 lb)

Shipping (including carrying case)

Weight 6.3 kg (13.9 lb)
 Size: L x W x H 350 x 560 x 180 mm (13.8 x 22.1 x 7.1 in)

Shipping (without carrying case)

Weight 4.4 kg (9.7 lb)
 Size: L x W x H 350 x 560 x 180 mm (13.8 x 22.1 x 7.1 in)

Miscellaneous

Serial data interface RS232
 Specification temperature 20 to 26°C (68 to 79°F)
 Operating (ambient) temperature 0 to 40°C (32 to 104°F)
 Storage (ambient) temperature -20 to 50°C (-4 to 122°F)
 Humidity 0 to 90% RH @ 30°C
 CE Conformity EN61326

INPUT SPEC'S (A MODELS ONLY)

All input specifications apply to the instrument connected

Transmitter supply

Output voltage 24VDC +10%
 Output current Maximum 28 mA

Accuracy automatic cold junction compensation

ASM-801/802 ..±0.20°C (±0.36°F) @ ambient temperature
 20 to 26°C (68 to 79°F)
 ASM-803±0.50°C (±0.90°F) @ ambient temperature
 20 to 26°C (68 to 79°F)
 Temperature drift outside 20 to 26°C . 0.05°C/°C 0.05°F/°F

Input specifications

A-models when used with other equipment *

RTD 4-wire 2.5 ppm rdg. (0-400 ohm)
 15 ppm rdg. (400-4000 ohm)
 RTD 3-wire 2.5 ppm rdg. + 50 mohm (0-400 ohm)
 15 ppm rdg. + 50 mohm (400-4000 ohm)
 mA 1 ppm rdg. (0-24 mA)
 MV, V 2uV

* Accuracies from the connected instruments has to be added

INPUT SPEC'S (B MODELS ONLY)

Transmitter supply

Output voltage 24VDC +10%
 Output current Maximum 28 mA

Transmitter input mA

Range 0 to 24 mA
 Accuracy (12 months) ±0.01% Rdg. +0.01% F.S.

Voltage input VDC

Range 0 to 12 VDC
 Accuracy (12 months) ±0.005% Rdg. +0.01% F.S.

Switch input

Switch dry contacts
 Test voltage Maximum 2.5 VDC
 Test current Maximum 0.8 mA

RTD input specifications

Signal type 2-, 3-, 4-wire true ohm RTD input
 Signal range 0-400 Ω (PT10/PT50/PT100)
 Accuracy (12 months) ±0.002% Rdg. +0.002% F.S.
 Signal range 0-4000 Ω (PT200/PT500/PT1000)
 Accuracy (12 months) ±0.002% Rdg. +0.005% F.S.

For 3-wire input add 50 mΩ assuming all three RTD leads are matched. For 2-wire add 100 mΩ.

Thermocouple specifications

Signal range -10mV – 78 mV
 Accuracy ±(0.005% of rdg. + 0.005% of F.S.)

Accuracy automatic cold junction compensation

ASM-801/802 ..±0.20°C (±0.36°F) @ ambient temperature
 20 to 26°C (68 to 79°F)
 ASM-803±0.50°C (±0.90°F) @ ambient temperature
 20 to 26°C (68 to 79°F)
 Temperature drift outside 20 to 26°C 0.05°C/°C
 (0.05°F/°F)

4-wire RTD Type	Temperature range				12 months accuracy	
	°C		°F		°C	°F
	From	To	From	To		
Pt10	-200	-80	-328	-112	0.198	0.357
alpha 385	-80	0	-112	32	0.210	0.378
	0	100	32	212	0.224	0.403
	100	155	212	311	0.225	0.405
	155	320	311	608	0.234	0.422
	320	420	608	788	0.250	0.450
	420	660	788	1220	0.263	0.473
	660	800	1220	1472	0.292	0.525
Pt50	-200	-80	-328	-112	0.042	0.076
alpha 385	-80	0	-112	32	0.046	0.083
	0	100	32	212	0.051	0.091
	100	155	212	311	0.052	0.093
	155	320	311	608	0.057	0.102
	320	420	608	788	0.062	0.112
	420	660	788	1220	0.069	0.124
	660	800	1220	1472	0.078	0.141
Pt100	-200	-80	-328	-112	0.023	0.041
alpha 385	-80	0	-112	32	0.026	0.046
	0	100	32	212	0.029	0.052
	100	155	212	311	0.030	0.054
	155	320	311	608	0.034	0.062
	320	420	608	788	0.038	0.069
	420	660	788	1220	0.044	0.080
	660	800	1220	1472	0.052	0.093
Pt200	-200	-80	-328	-112	0.247	0.445
alpha 385	-80	0	-112	32	0.262	0.471
	0	100	32	212	0.278	0.500
	100	155	212	311	0.279	0.502
	155	320	311	608	0.290	0.522
	320	420	608	788	0.309	0.556
	420	660	788	1220	0.323	0.582
	660	800	1220	1472	0.358	0.645
Pt500	-200	-80	-328	-112	0.101	0.182
alpha 385	-80	0	-112	32	0.108	0.194
	0	100	32	212	0.116	0.208
	100	155	212	311	0.117	0.210
	155	320	311	608	0.123	0.222
	320	420	608	788	0.133	0.239
	420	660	788	1220	0.141	0.254
	660	800	1220	1472	0.158	0.285
Pt1000	-200	-80	-328	-112	0.052	0.094
alpha 385	-80	0	-112	32	0.056	0.102
	0	100	32	212	0.062	0.111
	100	155	212	311	0.063	0.113
	155	320	311	608	0.068	0.122
	320	420	608	788	0.074	0.133
	420	660	788	1220	0.081	0.145
	660	800	1220	1472	0.092	0.165
M50	-200	-80	-328	-112	0.039	0.070
alpha 428	-80	0	-112	32	0.042	0.076
	0	100	32	212	0.045	0.081
	100	155	212	311	0.045	0.081
	155	200	311	392	0.046	0.083
M100	-200	-80	-328	-112	0.021	0.038
alpha 428	-80	0	-112	32	0.023	0.041
	0	100	32	212	0.026	0.047
	100	155	212	311	0.026	0.047
	155	200	311	392	0.027	0.049



The ASM-800 will fit into a lot of process industries and especially pharmaceutical, oil & gas and power plants. Original equipment manufacturers (OEM) will also benefit from calibrating and documenting multiple temperature sensors before final installation.

TC Type	Temperature range				12 month accuracy	
	°C		°F		°C	°F
	From	To	From	To		
B	250	320	482	608	1.31	2.35
	320	420	608	788	0.99	1.77
	420	660	788	1220	0.65	1.17
	660	800	1220	1472	0.56	1.01
	800	1000	1472	1832	0.44	0.78
	1000	1200	1832	2192	0.41	0.74
	1200	1400	2192	2552	0.39	0.70
	1400	1600	2552	2912	0.38	0.69
	1600	1820	2912	3308	0.40	0.72
E	-250	-200	-418	-328	0.74	1.34
	-200	-100	-328	-148	0.18	0.32
	-100	0	-148	32	0.09	0.17
	0	155	32	311	0.06	0.11
	155	320	311	608	0.06	0.12
	320	420	608	788	0.07	0.12
	420	660	788	1220	0.08	0.14
	660	800	1220	1472	0.09	0.16
J	-210	-100	-346	-148	0.23	0.41
	-100	0	-148	32	0.10	0.18
	0	155	32	311	0.08	0.14
	155	320	311	608	0.09	0.16
	320	420	608	788	0.09	0.17
	420	660	788	1220	0.09	0.17
	660	800	1220	1472	0.09	0.17
	800	1000	1472	1832	0.11	0.21
K	-250	-200	-418	-328	0.94	1.69
	-200	-100	-328	-148	0.27	0.49
	-100	0	-148	32	0.14	0.24
	0	155	32	311	0.10	0.19
	155	320	311	608	0.11	0.20
	320	420	608	788	0.11	0.20
	420	660	788	1220	0.13	0.23
	660	800	1220	1472	0.14	0.24
	800	1000	1472	1832	0.15	0.28
	1000	1200	1832	2192	0.17	0.31
N	-250	-200	-418	-328	1.37	2.47
	-200	-100	-328	-148	0.41	0.74
	-100	0	-148	32	0.20	0.35
	0	155	32	311	0.15	0.27
	155	320	311	608	0.13	0.23
	320	420	608	788	0.12	0.22
	420	660	788	1220	0.13	0.23
	660	800	1220	1472	0.14	0.24
	800	1000	1472	1832	0.15	0.27
	1000	1200	1832	2192	0.16	0.29
	1200	1300	2192	2372	0.17	0.31

TC Type	Temperature range				12 month accuracy	
	°C		°F		°C	°F
	From	To	From	To		
R	-50	0	-58	32	1.30	2.35
	0	155	32	311	0.78	1.40
	155	320	311	608	0.47	0.84
	320	420	608	788	0.40	0.73
	420	660	788	1220	0.39	0.70
	660	800	1220	1472	0.35	0.63
	800	1000	1472	1832	0.36	0.64
	1000	1200	1832	2192	0.34	0.61
	1200	1400	2192	2552	0.34	0.60
	1400	1600	2552	2912	0.35	0.62
S	-50	0	-58	32	0.98	1.76
	0	155	32	311	0.78	1.40
	155	320	311	608	0.49	0.89
	320	420	608	788	0.45	0.81
	420	660	788	1220	0.41	0.73
	660	800	1220	1472	0.40	0.72
	800	1000	1472	1832	0.39	0.70
	1000	1200	1832	2192	0.38	0.69
	1200	1400	2192	2552	0.38	0.69
	1400	1600	2552	2912	0.39	0.71
T	-250	-200	-418	-328	0.65	1.17
	-200	-100	-328	-148	0.27	0.49
	-100	0	-148	32	0.15	0.26
	0	155	32	311	0.10	0.18
	155	320	311	608	0.08	0.15
	320	400	608	752	0.08	0.14



ORDERING INFORMATION

Order number	Description
	Base model number
ASM801	ASM-801 series (with 8 universal screw plugs)
ASM802	ASM-802 series (with 8 TC plugs)
ASM803	ASM-803 series (with 8 LEMO plugs)
	Model version
A	Basic model no built-in measuring circuit
B	Including built-in measuring circuit
	Calibration certificate
F	Traceable certificate
H	Accredited certificate
	Options
C	Carrying case

ASM801BFC Sample order number

JOFRA ASM-801 B with standard accessories, traceable certification and carrying case.

When ordering an A model or you want to connect several ASM scanners please remember to order connection cables (see below).

STANDARD DELIVERY

- ASM signal multi-scanner (user specified)
- Mains adapter
- RS232 cable
- JOFRACAL software
- JOFRALOG software (B models only)
- Reference manual
- Screw driver (ASM-801 only)

ACCESSORIES

Connection cables:

- | | |
|--------|---|
| 122823 | Cable with banana / LEMO connection (ASM-A to ATC / ASC300 - RTD / Volt / mA) |
| 125534 | Cable (1150 mm) with male LEMO / LEMO connection (ASM-A to AMC910 / DTI-1000 - RTD) |
| 125587 | Cable with minicompensation / LEMO connection (ASM-A to ATC / ASC300 / AMC910 - TC) |
| 125618 | Kit with RS232 cable and cable (650 mm) with male LEMO / LEMO connection (ASM to ASM) |

Other accessories:

- | | |
|--------|---|
| 120517 | Thermocouple male plug type K (ASM-802) |
| 120514 | Thermocouple male plug type N (ASM-802) |
| 120515 | Thermocouple male plug type T (ASM-802) |
| 120519 | Thermocouple male plug type TYPE Cu-Cu (ASM-802) |
| 125620 | LEMO connection with strain relief (ASM-803) |
| 60E151 | 1 meter, 4 Core cable with shield for Pt100 (ASM-803) |
| 125002 | Edgeport converter with 4 RS232 ports. Connected and powered by the USB connection to the PC. Tested with JOFRA calibrators |



AMETEK Test & Calibration Instruments

A business unit of AMETEK Measurement & Calibration Technologies Division offering the following industry leading brands for test and calibration instrumentation.

JOFRA Calibration Instruments

Temperature Calibrators

Portable dry-block calibrators, precision thermometers and liquid baths. Temperature ranges from -90°C (-130°F) to 1205°C (2200°F). Temperature sensors for industrial and marine use.

Pressure Calibrators

Convenient electronic systems ranging from -25 mbar to 1000 bar - fully temperature-compensated for problem-free and accurate field use.

Signal Instruments

Process signal measurement and simulation for easy control loop calibration and measurement tasks.

M&G Pressure Testers & Pumps

Pneumatic floating-ball or hydraulic piston dead weight testers with accuracies to 0.015% of reading. Pressure generators delivering up to 1,000 bar.

Lloyd Instruments

Materials testing machines and software from Lloyd Instruments guarantees expert materials testing solutions. The comprehensive program also covers Texture Analysers to perform rapid, general food testing and detailed texture analysis on a diverse range of foods and cosmetics.

Davenport Polymer Test Equipment

Allows measurement and characterization of moisture-sensitive PET polymers and polymer density.

Chatillon Force Measurement

The hand held force gauges and motorized testers have earned their reputation for quality, reliability and accuracy and they represent the de facto standard for force measurement.

Newage Testing Instruments

Hardness testers, durometers, optical systems and software for data acquisition and analysis.

AMETEK[®]
TEST & CALIBRATION INSTRUMENTS

UK

AMETEK Calibration Instruments
Tel +44 (0)1243 833 302
jofra@ametek.co.uk

France

AMETEK S.A.S.
Tel +33 (0)1 30 68 89 40
general.lloyd-instruments@ametek.fr

Germany

AMETEK GmbH
Tel +49 (0)2159 9136 510
info.mct-de@ametek.de

Denmark

AMETEK Denmark
Tel +45 4816 8000
jofra@ametek.com

USA

AMETEK Mansfield & Green
Tel +1 (800) 527 9999
cal.info@ametek.com

India

AMETEK Instruments India Pvt Ltd.
Tel +91 22 2836 4750
jofra@ametek.com

Singapore

AMETEK Singapore Pte Ltd
Tel +65 6484 2388
jofra@ametek.com

China

AMETEK Inc. - Shanghai
Tel +86 21 5868 5111
AMETEK Inc. - Beijing
Tel +86 10 8526 2111
AMETEK Inc. - Guangzhou
Tel +86 20 8363 4768
jofra.sales@ametek.com.cn

www.jofra.com